

Performance Specification			
Normal Pressure			150LB
Test Pressure	Shell Test	3.0	MPa
	Seal Test	2.2	
	Air Test	0.6	
Working Tem		-29~150 ° C	
Medium		Water, Oil&Gas	



Technical Specification

1.Design&manufacture:According to ASME B16.34

2.Face to face:According to manufacturer's std.

3.Flange end:According to ASME B16.5

4.Test and inspection:According to API598

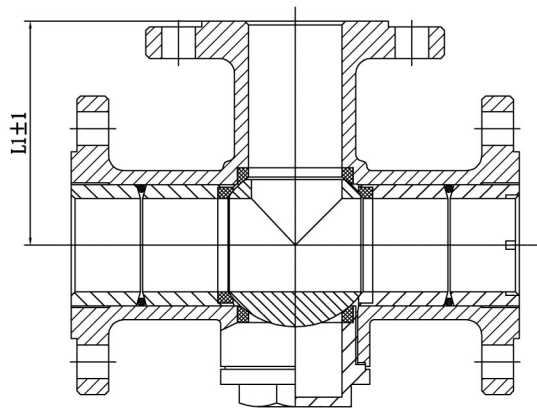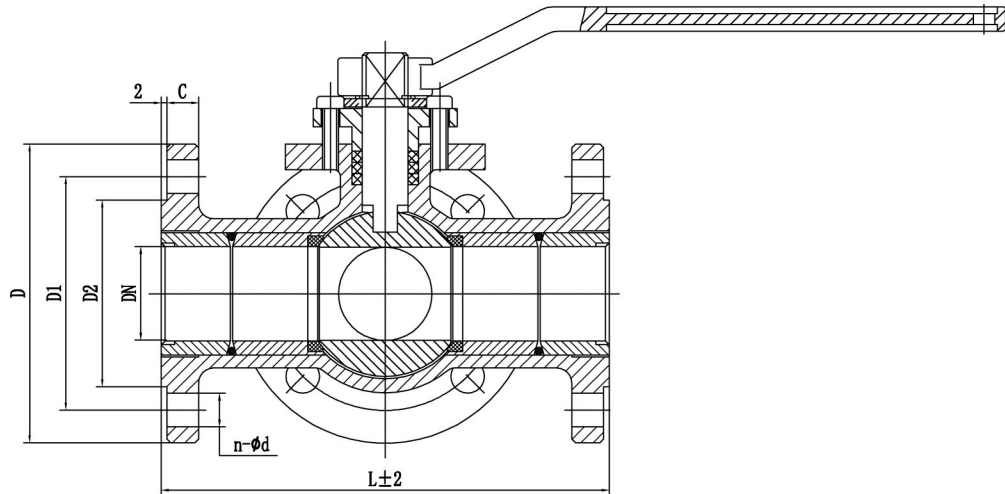

Mainly dimensions

DN	D	D1	D2	L	L1	C	W	H	n-φd
15	89	60.5	35	150	72	8.0	125	70	4-φ16
20	98	70	43	160	80	8.9	145	86	4-φ16
25	108	79.5	51	180	90	9.6	165	95	4-φ16
32	117	89	64	200	100	11.2	200	107	4-φ16
40	127	98.5	73	220	110	12.7	250	124	4-φ16
50	152	120.5	92	240	120	14.3	250	136	4-φ19
65	178	139.5	105	260	130	15.9	250	157	4-φ19
80	190	152.5	127	280	140	17.5	350	169	4-φ19
100	229	190.5	157	320	160	22.3	450	211	8-φ19
125	254	216	186	380	190	22.3	750	266	8-φ22
150	279	241.5	216	440	220	23.9	900	297	8-φ22
200	343	298.5	270	550	260	27	980	360	8-φ22

9	Gasket	PTFE	18		
8	Stem	F316	17		
7	Ball	316	16		
6	Seat	PTFE	15		
5	Gasket	PTFE	14		
4	Bolt	304	13	Bolt	S. S
3	Nut	304	12	Handle	C. S
2	Body	CF8M	11	Gland	S. S
1	Yoke	CF8M	10	Packing	Graphite
NO.	Parts Name	Material	NO.	Parts Name	Material

SIZE:DN15~DN200

3 WAY BALL VALVE, ANSI 150LB

FAT
FLOMATIC
T TYPE