



OA 50 Series Overall Dimention
And Performance Parameter

The Standard Type

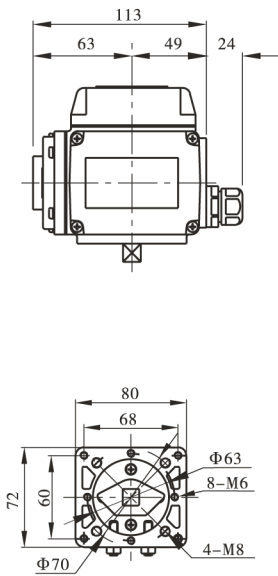

Parameters of The direct Type	
Square	□9x9,□11x11,□14x14
Flange	F03,F05,F07
Stem	Height≤19mm

The direct Type

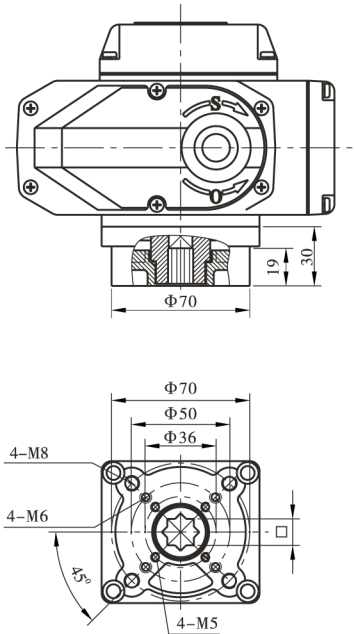

Parameters	type	OA 50				
	Power	DC24V	AC24V	AC110V	AC380V	AC220V
Performance						
Motor Power	13W	10W	10W	6W	10W	
Rated Current	1.28A	1.50A	0.24A	0.07A	0.16A	
Standard Time/Torque	20S/50Nm					
Optional Time/Torque	4S/20Nm 10S/30Nm				4S/20Nm 10S/30Nm 60S/50Nm	
Turning Angle	0~360° at any angle					
Available Control Circuit	Type A/B/C/D/E/F/G/H					
Total Weight	2.0kg					
Insulating Resistance	DC24V/AC24V:100MΩ/250VDC AC110V/AC220V/AC380V:100MΩ/500VDC					
Withstand Voltage Class	DC24V/AC24V:500VAC 1minte、AC110V/AC220V:1500VAC 1minte、AC380V:1800VAC 1minte、					
Protection Class	IP 67					
Installation Angle	360° at any angle					
Electric Interface	G1/2 waterproof cable connector: the power cord, signal lines each one					
Ambient Temperature	-30℃ ~ +60℃					
Supply function	Dehumidification Wet Heater					