


SOLENOID VALVE(5/2 WAY) NAMUR SERIES

Symbol

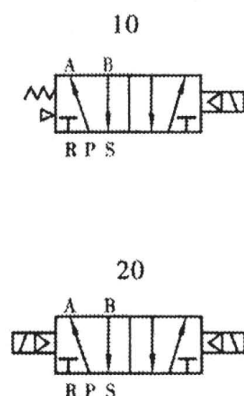

Specification

Item\Type	4M210-06	4M220-06	4M210-08	4M220-08	4M310-08	4M320-08	4M310-10	4M320-10
Fluid	Air (be filter by 40 μ colander)							
Operating	Internally piloted							
Valve type	5 ports 2 positions							
Orifice size	14mm ² (CV=0.78)		16mm ² (CV=0.78)		25mm ² (CV=1.4)		30mm ² (CV=1.68)	
Port size	In= Exhaust=1/8"		In= 1/4" Exhaust=1/8"		In= Exhaust=1/4"		In= 3/8" Exhaust=1/4"	
Lubrication	Non-lubricate							
Pressure range	1.5~8.0 Kg/cm ² (31~114Psi)							
Proof pressure	10.5 Kg/cm ² (150Psi)							
Temperature	5~60℃(41~140°F)							
Voltage range	± 10%							
Power consumption	AC: 4.5VA DC: 3W							
Insulation	F class							
Protection	IP65 (DIN40050)							
Connector	Socket with plug							
Max frequency	5 cycle/sec							
Min activating time	0.05 sec							
Weight	220g	320g	220g	320g	310g	400g	310g	400g

4M310-08

